

ML-6000X / ML-6000X Pro

New Generation **Digital Dispenser Unveiled!**



AI
Cyber-Physical System
Smart Factory
Industry 4.0

NEW


*High grade
model*



Features of next-generation dispenser

Excellent Dispensing Capability

Installed with air-pulse stabilizing circuit (PAT). Elimination of dispensing volume fluctuation, implementation of excellent dispensing accuracy.

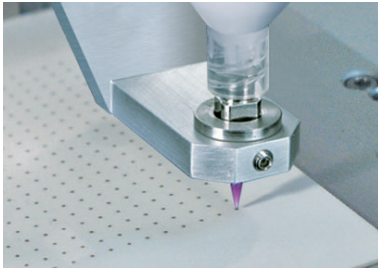

Next-generation Functions


Simplified Log function (Parameters recording: various dispensing pressure, dispensing time, channel, dispensing mode).

Other Enhanced Features | Simplified remaining volume detection / Interval function / Channels registration / Channels switching / Error output / Alarm output



User-friendly

2.4 inch Color graphic LCD display for easy setting & operation
Multi-language support (JPN, ENG, CHN).

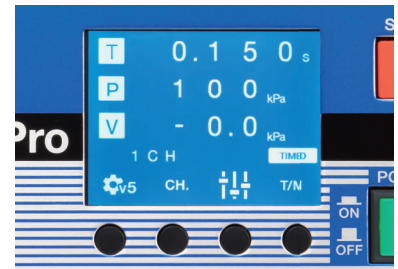

- Correspond to Industry 4.0, various abnormal error output.
- Simplified Log function.
- Simplified remaining volume detection function.
- Channels can be registered by a variety.
- Lineup of general purpose and high resolution vacuum specification.


Features of ML-6000X Pro

- Pressure setting can be set from the device side.
- Dispensing pressure can be selected from 2 types.


Dispensing Application



Dispensing UV on Camera Module

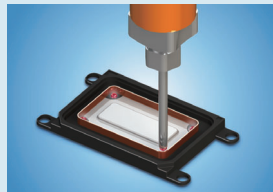

Speaker Vibration Membrane Attachment

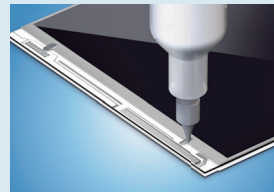

Dispensing Ag Paste on Touch Panel



Pressure Sensor Potting

ML-5000XII / ML-6000X Series comparison

Item		ML-5000X II (conventional model)	ML-6000X	ML-6000X Pro V5	ML-6000X Pro V2	
Dispensing performance	Pressure range	5 to 700 kPa	5 to 700 kPa	30 to 500 kPa	5 to 200 kPa	
	Dispensing volume precision	±2.01%	±1.96%	±1.86%	±1.72%	
	Dispensing pressure control system	Manual control	Manual control	Automatic control		
Operation interface	Display	Display type	7-segment LED	2.4 inch color LCD		
		Displayable information	Numbers	Icons, letters, numerical value		
		Supported languages	—	Japanese / English / Chinese		
	Operation	Digi-switch	Mechanical switch			
I / O interface	Metal connector	●	● (Conversion option)			
	D-sub I / O	—	●			
Data communications	RS-232C	—	●			
Power	Input form	AC power cord	AC adapter			
	Supports 24V DC input	—	●			
Function	Discharge condition management	Channel number	—	100 ch		
		Name registration	—	●		
	Production control	—	●			
	Auto-increment	Auto-increment	—	—	●	
		Auto-slope	—	—	●	
	others	Interval dispensing	—	●		
Pressure unit switching (kPa / bar)		—	●			
	I / O check mode	—	●			

Compact size

conventional model



ML-6000X Series

Improved display visibility



conventional model

4-digit LED digital display

ML-6000X Series

2.4 inch color graphic LCD

Specification


Description		High Precision Digital Dispenser				
Model	ML-6000X-CTR-N-VHR	ML-6000X-CTR-N-GP	ML-6000XP-CTR-V5-N-VHR	ML-6000XP-CTR-V2-N-VHR	ML-6000XP-CTR-V5-N-GP	ML-6000XP-CTR-V2-N-GP
Dispense method	Air-pulse type					
Control system	Microprocessor digital control system					
Display	2.4 inch color graphic LCD					
Dispensing mode	Timed mode, manual mode					
Dispensing pressure adjustment range	5.0 to 700.0 kPa		30.0 to 500.0 kPa	5.0 to 200.0 kPa	30.0 to 500.0 kPa	5.0 to 200.0 kPa
Dispensing time setting range	0.001 to 99.999 sec, 0.01 to 999.99 sec, 0.1 to 9,999.9 seconds (Enable to switch digits by Icon Keys)					
Vacuum pressure setting range	0 to -20.0 kPa (with air supply of 600 kPa)		0 to -20.0 kPa (with air supply of 600 kPa)	0 to -10.0 kPa (with air supply of 400 kPa)	0 to -20.0 kPa (with air supply of 600 kPa)	0 to -10.0 kPa (with air supply of 400 kPa)
Vacuum pressure control system	Precision needle valve (Approx. -1 kPa per a turn)	Standard needle valve (Approx. -4 kPa per a turn)	Precision needle valve (Approx. -1 kPa per a turn)		Standard needle valve (Approx. -4 kPa per a turn)	
Main function	Operation history, Dispensing shot counter, Residue alarm, Pressure error, Solenoid valve alarm, Channel registration, Channel switching, Channel copy, Key lock, Interval dispensing, Display language switching, Manual/Timed mode switching, Stopwatch		Operation history, Dispensing shot counter, Residue alarm, Pressure error, Solenoid valve alarm, Channel registration, Channel switching, Channel copy, Key lock, Interval dispensing, Display language switching, Manual/Timed mode switching, Stopwatch, Auto-increment function, Auto-slope function			
The number of channels	100 CH					
RS-232C serial communication	1 port					
External input/output signal (D-sub I/O)	Connector	D-sub25 (socket)				
	Input	Optocoupler input DC12 V, 5 mA Dispensing, preset, dispensing enabled, step, dispensing mode switching				
Source pressure	Output	Optocoupler open collector output DC24V, 10mA or below Dispensing completion, solenoid valve alarm, power on, ready, In-dispensing, alarm, error		Optocoupler open collector output DC24V, 10mA or below Dispensing completion, solenoid valve alarm, power on, ready, In-dispensing, alarm, error, auto-increment completion		
	Connection specifications	One-touch joint for OD 6 mm				
Range	Max. 800 kPa (Dispensing pressure + 100 kPa or more)		Max. 800 kPa (Dispensing pressure + 100 kPa or more)	Max. 400 kPa (Dispensing pressure + 100 kPa or more)	Max. 800 kPa (Dispensing pressure + 100 kPa or more)	Max. 400 kPa (Dispensing pressure + 100 kPa or more)
Rated current and frequency	When supplying from DC24 V DSUB 25 pin, When supplying from a DC12 V DC jack * 1 * 2					
Power consumption	12 W					
Usage environment (indoor only)	Temperature: 15 to 35°C, Humidity: 30 to 75% (without condensation), Altitude: below 2,000 m					
Storage environment	Temperature: 1 to 60°C, Humidity: 30 to 80% (without condensation)					
Storage environment	W180×D185×H83 mm					
Weight	2.2 kg	2.1 kg	2.2 kg		2.0 kg	
Compatible specification	EU RoHS2, CE marking (EMC directive)					
Options	Handy switch, Foot switch, Syringe stand, various connection cables, etc.					

* 1 The AC adapter is not included in the product.

* 2 Use one of the following methods to supply power.

- Use our ACAT-2 (input rating AC100-240V 50 / 60Hz).
- Use an AC adapter that conforms to EN-62368-1: 2014. (Compatible plug $\phi 5.5 \times 2.1$ L = 9.5, Center Plus)
- Use a SELV power supply that meets the CE marking LVD matching standard.

External dimensions diagram

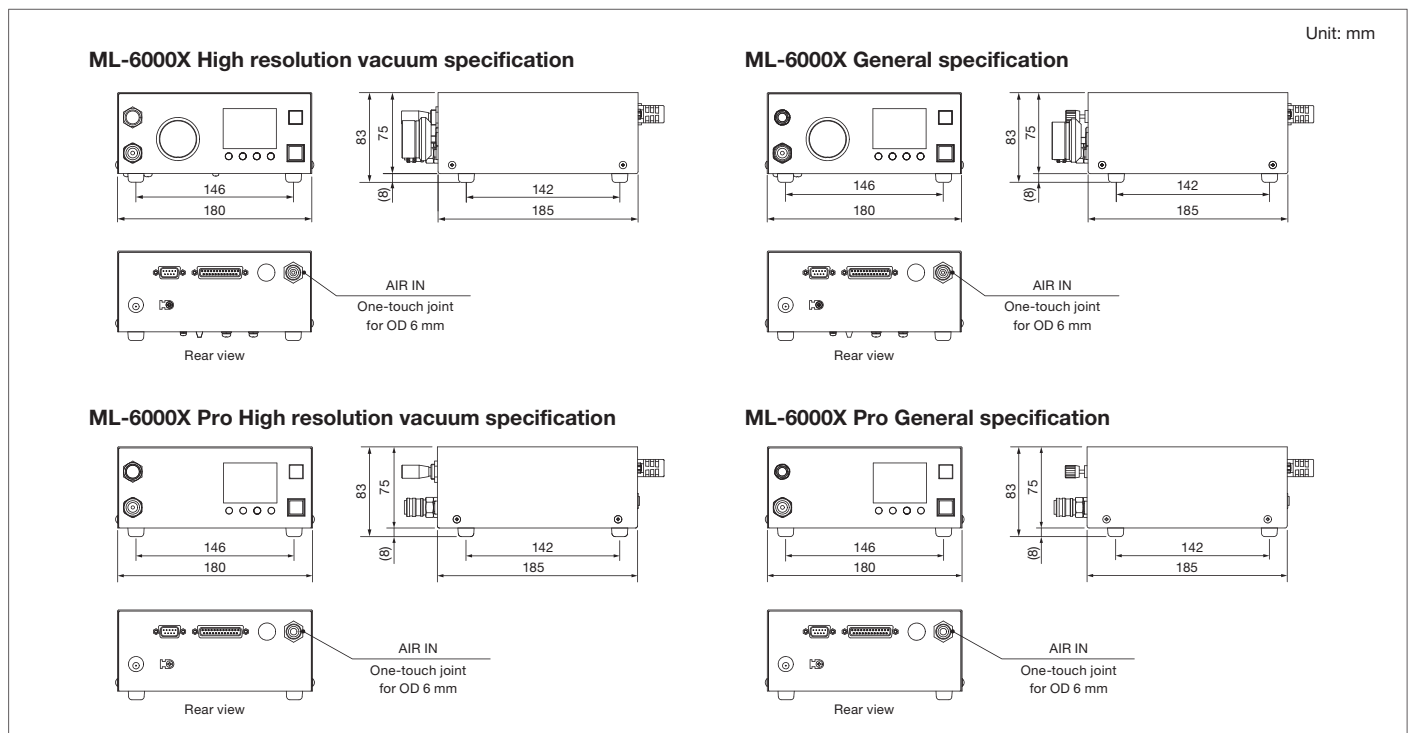

System configuration



Syringe



Cartridge



Desktop and gantry robots



FA dispense machine

Peripheral equipment / options

Temperature control system



High precision dispensing of high-viscosity materials is achieved, even if material viscosity is changed by environmental temperatures.

Syringe centrifugal bubble eliminator



Bubbles are eliminated just by placing syringes and pressing the switch. Equipped with abnormal vibration detection function.

Simple syringe filling unit



Quick and easy syringes filling with small volumes from fluid material containers, without bubbles.

Handy switch



Handy switches that is fit on the tip of syringe to control dispensing ON/OFF for manual application. The soft touch switch operation offers precise dispensing control and less nozzle off-target.

Foot switch



This switch is used to control dispensing ON/OFF with your foot.

Handy switch compatible Syringe stand



These stands are used for holding the syringe during and after operation.

Model: ①SYS-5B for 5 mL / ②SYS-10B for 10 mL
③SYS-20B for 20 mL / ④3SYS-30B for 30 mL
⑤SYS-50B for 50 mL



Safety precautions

Please read the instruction manual carefully before use to ensure correct and safe usage.

*These specifications are subject to change without any notice.

*The copyright of this catalog belongs to our company. Reproduction and distribution of the pictures, illustrations and any other information in this catalog to any other media without prior written permission are strictly prohibited; doing so will result in copyright infringement.

MUSASHI ENGINEERING, INC. (headquarters) is certified and registered according to the ISO 9001 Quality Management System and the ISO 14001 Environmental Management System.



<http://www.musashi-engineering.co.jp/english/>



World Leading Dispenser
MUSASHI ENGINEERING, INC.

HEAD OFFICE

8-7-4, Shimorenjaku, Mitaka-shi, Tokyo, 181-0013, Japan TEL:(81)422-76-7111 / FAX:(81)422-76-7122

BRANCH

TOKYO, OSAKA, NAGOYA, SENDAI, FUKUOKA, SAITAMA, NAGANO, EAST-KANTO, AKITA, KANAZAWA

SINGAPORE	10 Ubi Crescent #05-24 Ubi Techpark Lobby B Singapore 408564 TEL:(65)6258-2422 / FAX:(65)6258-4844
THAILAND	No.12 Soi Bangna-Trad 25, Bangnanuea, Bangna, Bangkok 10260 Thailand TEL:(66)2-022-9015 / FAX:(66)2-769-5450
INDONESIA	Jl. MH. Thamrin, Robson Square, Block A-15, Lippo Cikarang, Bekasi 17550, Jawa Barat, Indonesia TEL:(62)21-8990-5005 / FAX:(62)21-8990-5004
GERMANY	Marcel-Breuer-Str. 15, D-80807 Munich, Germany TEL:(49)89-321996-06 / FAX:(49)89-321996-07
KOREA	(902 No. 9 F. #C, Korea Bio Park.) 700, Daewangpangyo-ro, Bundang-gu, Seongnam-si, Gyeonggi-do 13488, Korea TEL:(82)31-702-3811 / FAX:(82)31-702-3881
TAIWAN	8F-2, No. 158, Sec. 2, Gongdao 5th Road, Hsinchu, Taiwan 30070 TEL:(886)3-572-9200 / FAX:(886)3-572-9300

CHINA

HONG KONG	Unit 1706, 17/F., Greenfield Tower, (South) Concordia Plaza, No.1 Science Museum Road, T.S.T.East, Kowloon, H.K. TEL:(852)2620-5799 / FAX:(852)2620-5771
SHANGHAI	A-120 Room, No.525 Xian Feng Street (No.55 Jin Yu Road). Min Hang, Shanghai, China TEL:(86)21-6446-7881 / FAX:(86)21-6446-7882
SHENZHEN	1st floor 102, building 3 of Winlead, Fada road, Bantian Street, Longgang District, Shenzhen TEL:(86)755-8346-6822 / FAX:(86)755-8346-6866
TIANJIN	Room 1601, Sino Ocean International Center, No. 40 Huachang Road, Hedong District, Tianjin TEL:(86)22-5856-2051
SUZHOU	Room 1010, No.188 Wang Dun Road, GENWAY BUILDING, Suzhou City Industrial estate Distric, Jiangsu, CHINA TEL:(86)512-6878-4428 / FAX:(86)512-6878-4438